

# AT388

## Foldable Antenna Bluetooth UHF RFID Reader

### High Performance with Sleek Design

- UHF RFID EPC Gen2, ISO / IEC 18000-6C
- 1D & 2D Barcode Scanning
- Bluetooth V2.1+EDR / BLE V4.1
- OLED Display
- Compatible with Windows, Android & iOS

### Unique & Rugged

- Foldable Antenna for Multiple Usage
- Drop Specification 1.5m (5ft)
- IP65



Homepage : [www.atid1.com](http://www.atid1.com)

e-mail : [inquiry@atid1.com](mailto:inquiry@atid1.com)

Tel : +82-2-544-1436


# AT388

## Specification

PERFORMANCE	
Processor	ARM7 Core
Supported Platforms	Windows, Android, iOS (BLE Only)
Internal Storage	1M Byte Flash Memory
PHYSICAL CHARACTERISTICS	
Dimensions (W x L x H)	50 x 164 x 30 (54) mm
Weight	210g (Reder Only, without Battery)
Power	3,200 mAh / Lithium-Ion Battery (Rechargeable, 18650 Size)
Display	1.3 Inch OLED
USB Interface	1 USB Port / Micro USB
Host Protocol	VCP, HID
Notification	LED Indicator, Buzzer, Vibrator
DATA COLLECTION	
Protocol	EPC GEN2, ISO/IEC 18000-6C
Reading Range	~ 6 m (Depending on environment and tag type)
Writing Range	~ 0.5m (Depending on environment and tag type)
RF Output	1 W / 30 dBm (Max)
UHF RFID	KR / KC : 917 ~ 921 MHz
Support	US / FCC : 902 ~ 928 MHz
Frequency	EU / CE : 865 ~ 868 MHz
(Optional)	JP / TELEC : 916 ~ 921 MHz (1W) 916 ~ 924 MHz (0.25W)
Batch Mode	Up to 10,000 tag data can be stored
Antenna	Circularly Polized Antenna / 1 dBi
Barcode	2D Engine (Support to read 1D & 2D Barcode)

COMMUNICATION	
Bluetooth	BT V2.1+EDR / BLE V4.2
USER ENVIRONMENT	
Operation Temperature	-20°C to 50°C
Storage Temperature	-30°C to 70°C
Humidity	5 ~ 95% (non-condensing, +25°C)
Drop Specification	1.5 m (5ft)
Sealing	IP65

\* All Features and specifications described are subject to change without notice.

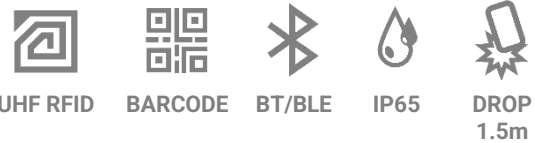

## Certification



## Accessories



USB Cable



Hand Strap



18650 Battery

